

Indicator Status

Blue light (Zigbee)	Red light(WIFI)	Gateway status	Remark
		Power-on start of the equipment	two lights briefly on and then off, and the device reboots and enters the distribution network state (default EZ pattern)
Constant light	Flash 250ms/times	EZ pattern	
Constant light	Slow flash 1500ms/times	AP pattern	
Log out	Constant light	Connected successfully and working properly	
Flash	Constant light	Add sub device	

Product Specification

Product name	Wireless Smart Gateway
Product model	PZWG-01
Power input	1A
Operating temperature	-10 C -55 C
Operating humidity	10%-90%RH(Non-condensing)
Power supply	Micro USB DC5A
Wireless technology	Wi-Fi 802.11 b/g/n
	Zigbee 802.15.4




Packing List

- Wireless Smart Gateway x1
- Data Cable x1
- Product Manual x1

Product Introduction

Intelligent gateway is the control center of Zigbee equipment, Users can add devices and reset ,third-party control and Zigbee group control to meet the requirements of smart home and other applications etc.

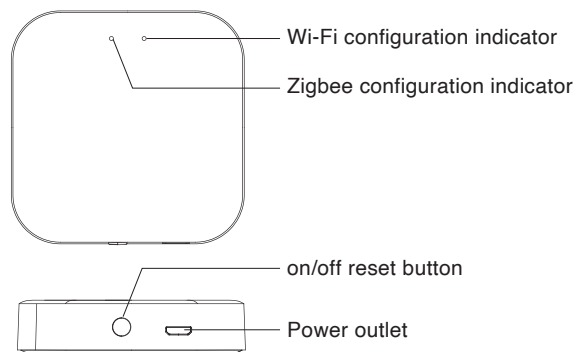

Preparation for Use

- 1 Connect the device to the power supply and make sure that the phone is connected to a 2.4GHz Wi-Fi network
- 2 Search for "Primero" in the App store or scan the QR code on the outer package or in the manual to download and install the App.
- 3 After logging in, follow the instructions to create a family.



Network Access Setting

- Confirm that the network configuration light (red light) blinks (if the network configuration light is in another state, press the reset button for 5 or 6 seconds and wait for the red light blinks); Follow the App instructions to add device
- Open "My family" page in "Primero" App, click "+" button in the top right corner;
- Select "Wireless gateway (Zigbee)" under "Add Manually"



- When added, the device can be found on the "My family" list.